



The electropumps NR, NR4 series comply with the European Regulation no. 547/2012 in force starting from 01.01.2013.

### Materials

Component	Material
Pump casing Lantern bracket	Cast iron GJL 200 EN 1561
Impeller	Cast iron GJL 200 EN 1561 (Brass P-Cu Zn Pb 2 EN 1982 for NR-NR4 40, 50)
Shaft	Chrome-nickel steel AISI 303 for pumps up to 1.1 kW Chrome steel AISI 430 for pumps from 1.5 to 4 kW
Mechanical seal	Carbon - Ceramic - NBR
Counterflanges	Steel Fe 42 UNI 7070

### Special features on request

- Other voltages. - Protection IP 55. - Frequency 60 Hz
- Special mechanical seal. - Higher or lower liquid or ambient temperatures.
- Motor suitable for operation with frequency converter up to 0,75 kW for NR4 and up to 1,5 kW for NR.

### Construction

Close-coupled, single-impeller, centrifugal pumps; electric motor with extended shaft directly connected to the pump. Pump casing with suction and delivery connections with the same diameter and on the same axis (in-line).

**Connections:** Flanges PN 10, EN 1092-2.

### Counterflanges (on request)

Sizes	Flanges
NR, NR4 40, 50, 65	Screwed flanges PN 16, EN 1092-1
NR4 100, NR4 125	Flanges for welding PN 10, EN 1092-1

### Applications

For clean liquids, without abrasives, which are non-aggressive for the pump materials (contents of solids up to 0.2%).

For heating, conditioning, cooling and circulation plants.

For civil and industrial applications.

When low noise operation is required (n ≈ 1450 rpm).

### Operating conditions

Liquid temperature from -10 °C to +90 °C.

Ambient temperature up to 40 °C.

Total suction lift up to 7 m.

Maximum permissible working pressure up to 10 bar.

Continuous duty.

### Motor

2-pole induction motor, 50 Hz (n = 2900 rpm).

**NR :** three-phase 230/400 V ± 10% up to 3 kW;  
400/690 V ± 10% from 4 to 18,5 kW.

**NRM :** single-phase 230 V ± 10%.

4-pole induction motor, 50 Hz (n = 1450 rpm).

**NR4 :** three-phase 230/400 V ± 10% up to 3 kW;  
400/690 V ± 10% for 4 kW.

**NRM4 :** single-phase 230 V ± 10%.

Insulation class F.



Protection IP 54.

Motor suitable for operation with frequency converter from 1,1 kW for NR4 and from 2,2 kW for NR.

**Classification scheme IE2 for three-phase motor from 0,75 kW.**

Constructed in accordance with EN 60034-1, EN 60034-30.  
EN 60335-1, EN 60335-2-41.

### Coverage chart

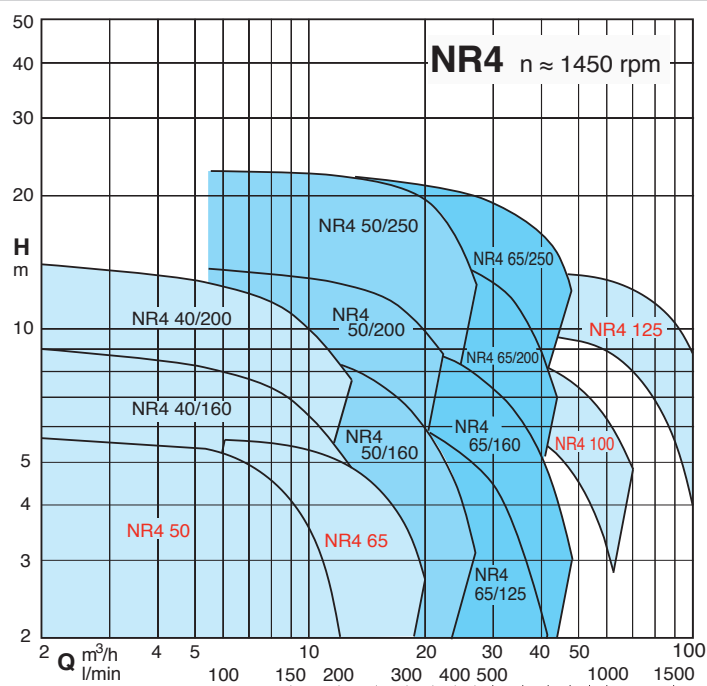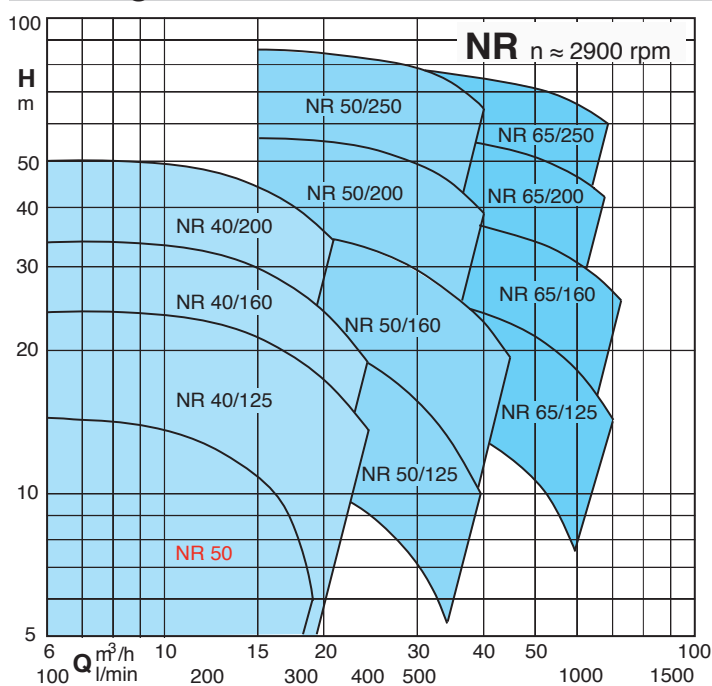



### Performance n ≈ 1450 rpm

3 ~	230V 400V		1 ~	230V P1		P2		Q m³/h																
	A	A		A	kW	kW	HP		0	2	4	6	8	10	12	14	16	18	20	25				
									l/min	0	33	67	100	133	167	200	233	267	300	333	417			
NR4 50C/A	1,4	0,8	NR4M 50C/A	2,1	0,27	0,25	0,34	H	3,9	3,9	3,8	3,3	2,5											
NR4 50B/A	1,4	0,8	NR4M 50B/A	2,1	0,29	0,25	0,34	m	4,7	4,7	4,6	4,3	3,5	2,3										
NR4 50A/A	1,4	0,8	NR4M 50A/A	2,1	0,33	0,25	0,34		5,6	5,6	5,5	5,2	4,5	3,5	2									
NR4 65C/A	1,4	0,8	NR4M 65C/A	2,1	0,31	0,25	0,34		3,8			3,8	3,7	3,5	3,1	2,6	1,9							
NR4 65B/A	2,1	1,2				0,37	0,5		4,7			4,7	4,6	4,5	4,2	3,8	3,2	2,5						
NR4 65A/A	2,1	1,2				0,37	0,5		5,6			5,6	5,5	5,3	5	4,6	4,1	3,5	2,7					

5

3 ~	230V 400V		P2	Q m³/h																				
	A	A			kW	HP	0	2,4	3	3,6	4,8	5,4	6	7,5	8,4	9,6	10,8	12	13,2	15				
									l/min	0	40	50	60	80	90	100	125	140	160	180	200	220	250	
NR4 40/160B	1,65	0,95		H	7,3	7,3	7,2	7,1	6,9	6,8	6,6	6,1	5,8	5,2	4,4	3,5	2,5							
NR4 40/160A	1,65	0,95		m	9,1	9,0	9,0	9,0	8,8	8,7	8,6	8,1	7,8	7,2	6,5	5,7	4,8	3,3						
NR4 40/200B	2,6	1,5			12,9	12,5	12,4	12,2	11,9	11,7	11,4	10,7	10,2	9,1	7,7	6,2	4,4							
NR4 40/200A	3,3	1,9			14,7	14,3	14,2	14,1	13,9	13,7	13,5	12,9	12,4	11,6	10,5	9,2	7,7	4,9						





3 ~	230V 400V		P2	Q m³/h																					
	A	A			kW	HP	0	5,4	6	7,5	8,4	9,6	10,8	12	13,2	15	16,8	18,9	21	24	27	30			
									l/min	0	90	100	125	140	160	180	200	220	250	280	315	350	400	450	500
NR4 50/160C	1,6	0,92		H	5,9	5,9	5,8	5,7	5,6	5,4	5,2	5	4,7	4,2	3,7	3,1	2,3								
NR4 50/160B	2,6	1,5		m	7,3	7,4	7,4	7,2	7,1	6,9	6,7	6,4	6,2	5,7	5,2	4,5	3,8	2,5							
NR4 50/160A/A	3,3	1,9			9,2	9,2	9,2	9,1	9	8,9	8,7	8,4	8,2	7,6	7,1	6,4	5,6	4,4	3,1						
NR4 50/200B/A	5	2,9			12,8	12,6	12,5	12,3	12,1	11,9	11,5	11,2	10,7	10	9,2	8,2	7,1	5,2							
NR4 50/200A/A	5	2,9			14,3	14,1	14	13,9	13,7	13,5	13,2	12,8	12,4	11,7	11	10	8,8	7,3							
NR4 50/250C/A	6	3,5			17,1	17	16,9	16,6	16,4	16,1	15,9	15,6	15,2	14,6	13,9	12,8	11,3	8,5	5,3						
NR4 50/250B/A	8,6	5			21	20,9	20,8	20,5	20,3	20	19,7	19,4	19	18,4	17,8	16,8	15,6	13,8	11,7	8,5					
NR4 50/250A/A	11,1	6,4			22	21,9	21,9	21,8	21,6	21,4	21,1	20,9	20,5	19,9	19,2	18,3	17,2	15,3	13,4	11					

3 ~	230V 400V		P2	Q m³/h																				
	A	A			kW	HP	0	10,8	12	13,2	15	16,8	18,9	21	24	27	30	33	37,5	42	48			
									l/min	0	180	200	220	250	280	315	350	400	450	500	550	630	700	800
NR4 65/125F	1,65	0,95		H	4,1	3,9	3,85	3,8	3,6	3,5	3,3	3	2,6	2,1	1,6	1								
NR4 65/125D	2,6	1,5		m	5,3	5	5	4,9	4,8	4,7	4,5	4,3	3,9	3,4	2,9	2,4	1,5							
NR4 65/125A/A	3,3	1,9			6,3	6,2	6,1	6	5,9	5,8	5,7	5,5	5,1	4,6	4,1	3,5	2,6	1,5						
NR4 65/125S/A	3,3	1,9			6,8	6,6	6,6	6,5	6,4	6,3	6,1	5,9	5,6	5,1	4,6	4,1	3,2	2,1						
NR4 65/160B/A	5	2,9			8,2	8,2	8,2	8,1	8	7,9	7,7	7,5	7,1	6,6	6	5,4	4,3	3,2						
NR4 65/160A/A	5	2,9			9,7	9,6	9,5	9,5	9,4	9,2	9	8,8	8,5	8	7,4	6,8	5,8	4,7	3					
NR4 65/200C/A	5	2,9			11,4	11,3	11,2	11,1	10,8	10,6	10,3	9,9	9,4	8,7	7,9	7	5,3	3,4						
NR4 65/200B/A	6	3,5			13,3	13,1	13	12,9	12,7	12,4	12,1	11,8	11,2	10,5	9,7	8,9	7,2	5,4						
NR4 65/200A/A	8,6	5			14,5	14,6	14,5	14,4	14,2	13,9	13,6	13,2	12,7	12	11,3	10,5	9	7,2						
NR4 65/250D/A	8,6	5			13,7	13,9	13,8	13,8	13,6	13,4	13,1	12,8	12,3	11,6	10,9	10,1	8,6	7,2						
NR4 65/250C/A	8,6	5			17,1	17,3	17,2	17,2	16,9	16,7	16,3	16	15,4	14,7	13,9	13	11,4	10						
NR4 65/250B/A	11,1	6,4			19,9	20,1	20	20	19,8	19,6	19,3	19	18,4	17,7	16,9	16,1	14,6	13,2	10,8*					
NR4 65/250A/A	14,4	8,3			21,4	21,6	21,5	21,4	21,3	21,1	20,8	20,5	19,9	19,2	18,4	17,6	16,1	14,7	12,2*					





3 ~	230V 400V		P2	Q m³/h																			
	A	A			kW	HP	0	20	25	30	35	40	50	60	70	80	90	100	110				
									l/min	0	333	417	500	583	667	833	1000	1167	1333	1500	1667	1840	
NR4 100C/A	5	2,9		H	6,6	6,6	6,4	6,3	6	5,6	4,6	3,3											
NR4 100B/A	5	2,9		m	7,5	7,5	7,4	7,2	7	6,6	5,6	4,4											
NR4 100A/A	6	3,5			9	9	8,9	8,8	8,6	8,3	7,4	6,2	4,8										
NR4 125C/A	8,6	5			10,2			10,2	10,1	10	9,6	9	8,2	7,1	5,7	4							
NR4 125B/A	11,1	6,4			12			12	11,9	11,8	11,6	11	10,4	9,4	8,2	6,7	5,1						
NR4 125A/A	14,4	8,3			13,6			13,6	13,5	13,4	13,2	12,9	12,3	11,4	10,3	8,8	7,2						

P1 Max. power input. P2 Rated motor power output. Tolerances according to UNI EN ISO 9906:2012





### Characteristic curves $n \approx 2900$ rpm

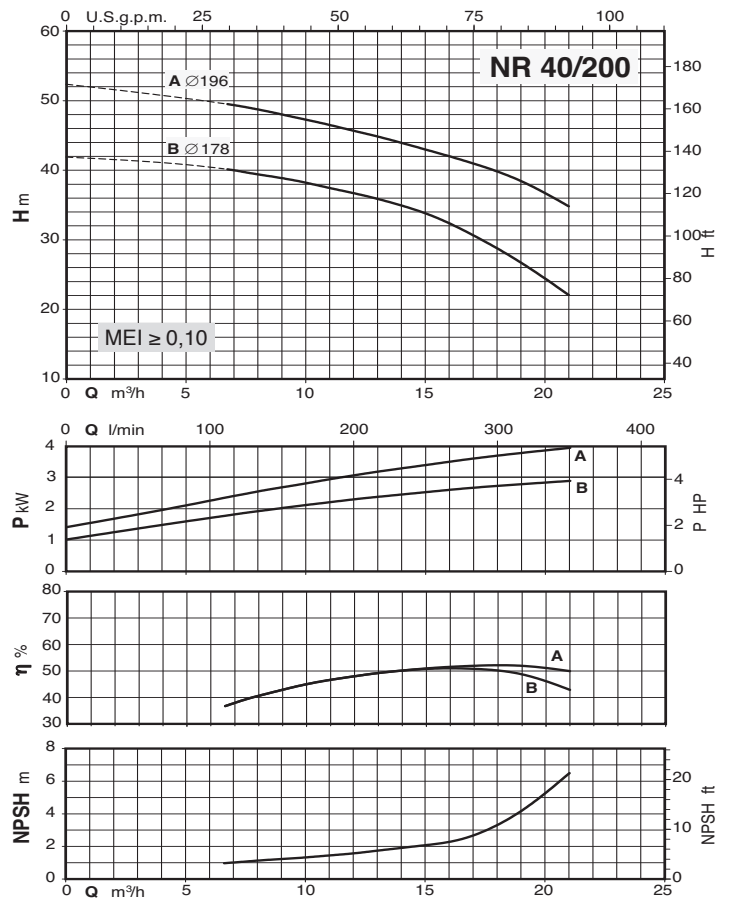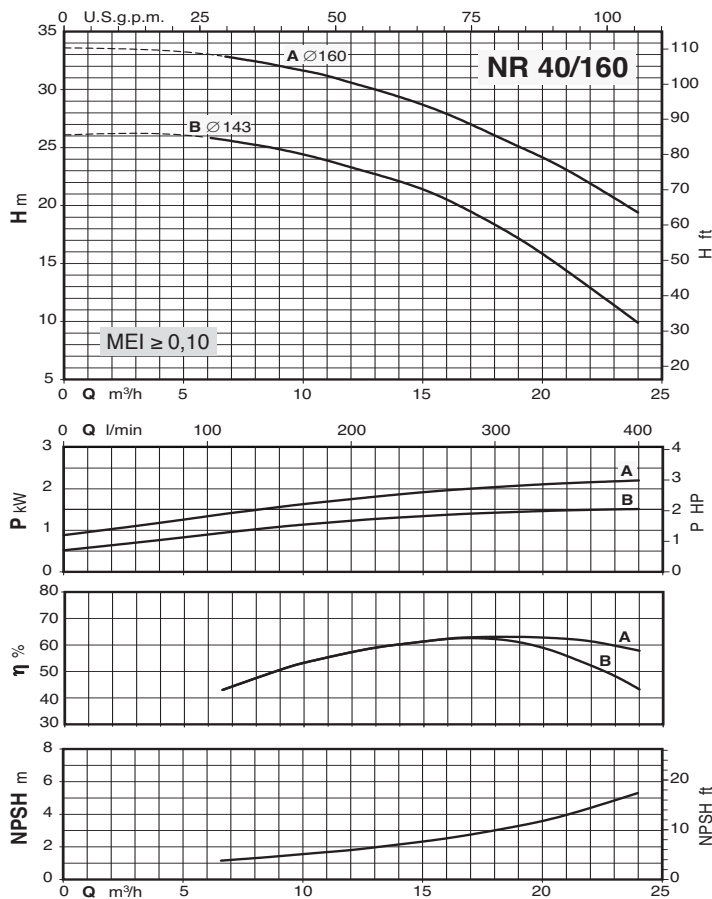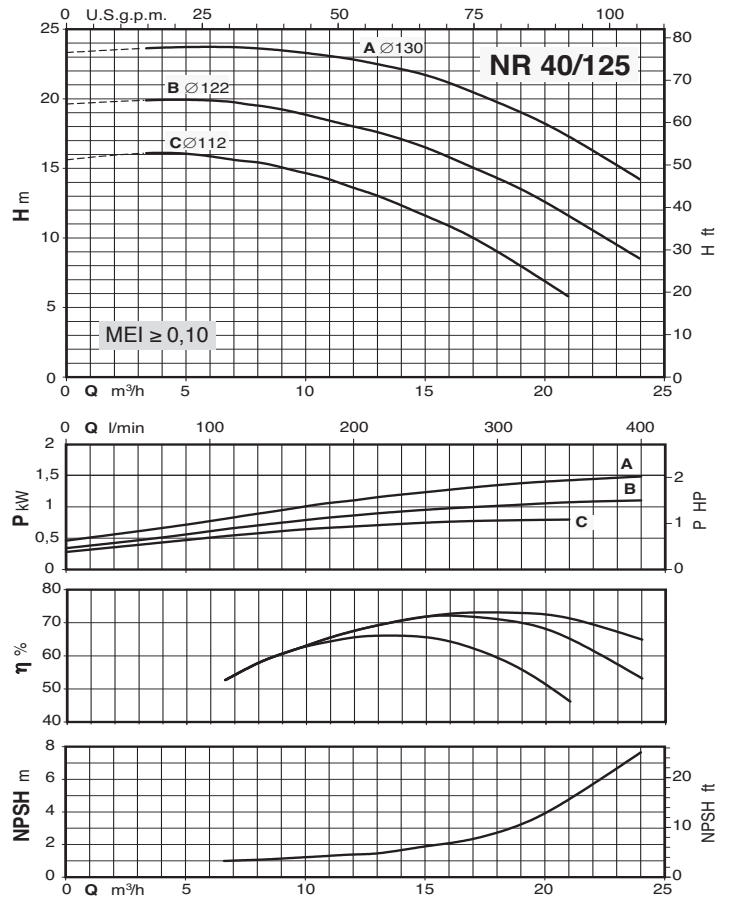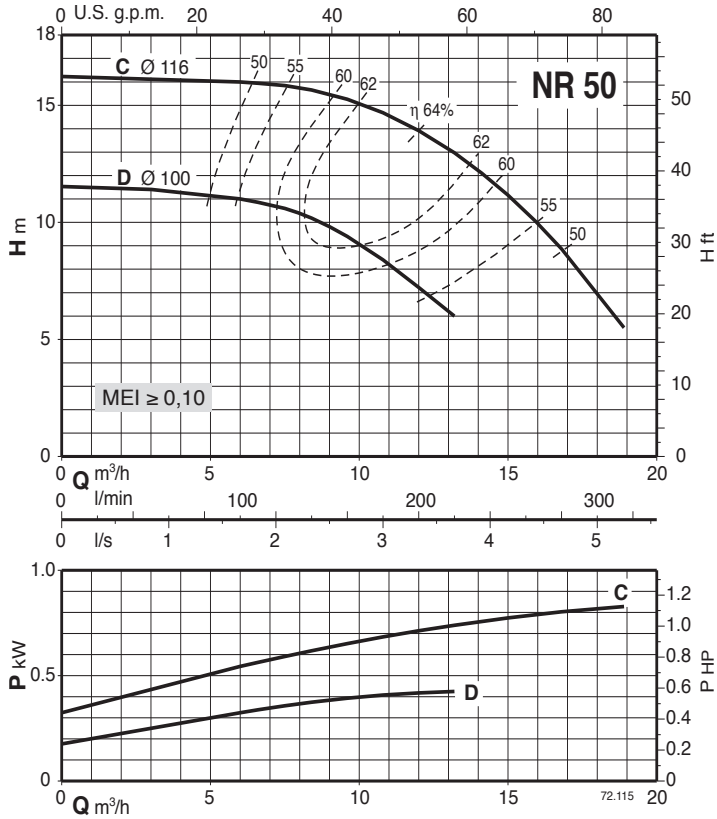












### Characteristic curves $n \approx 2900$ rpm

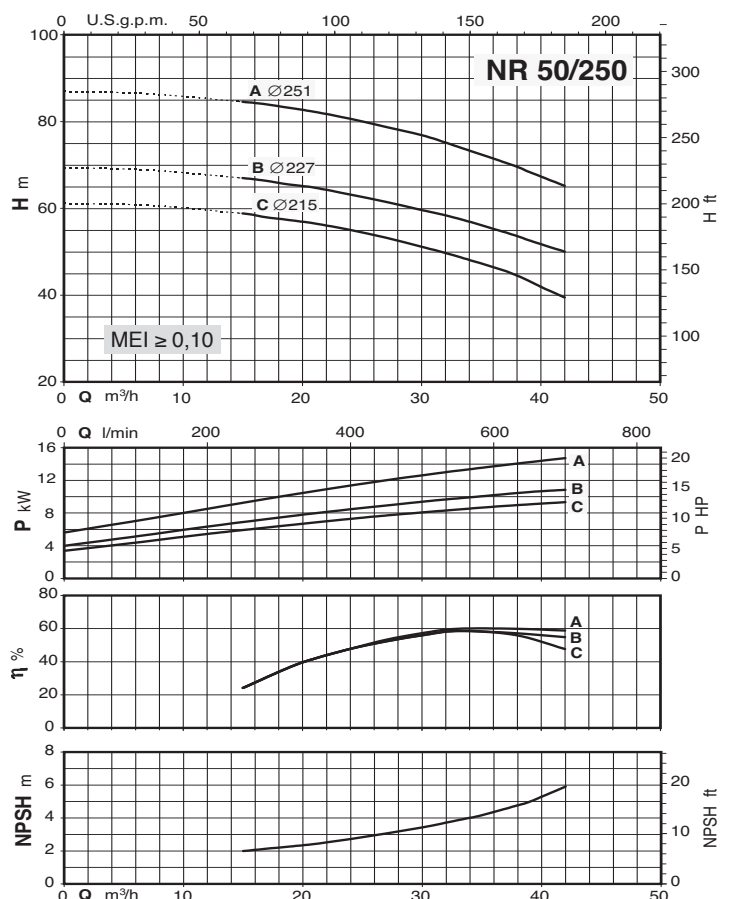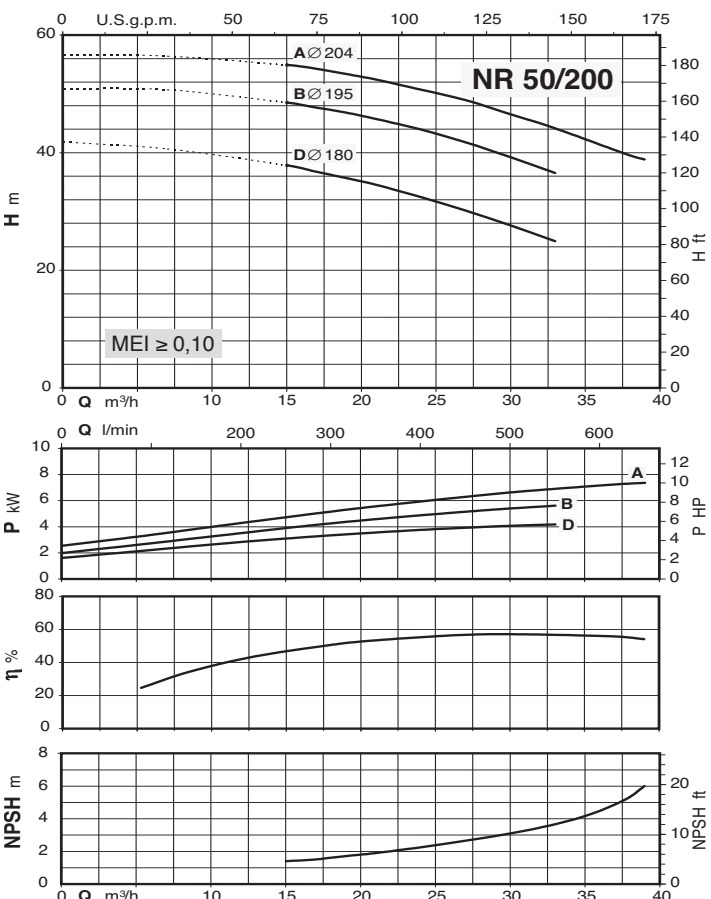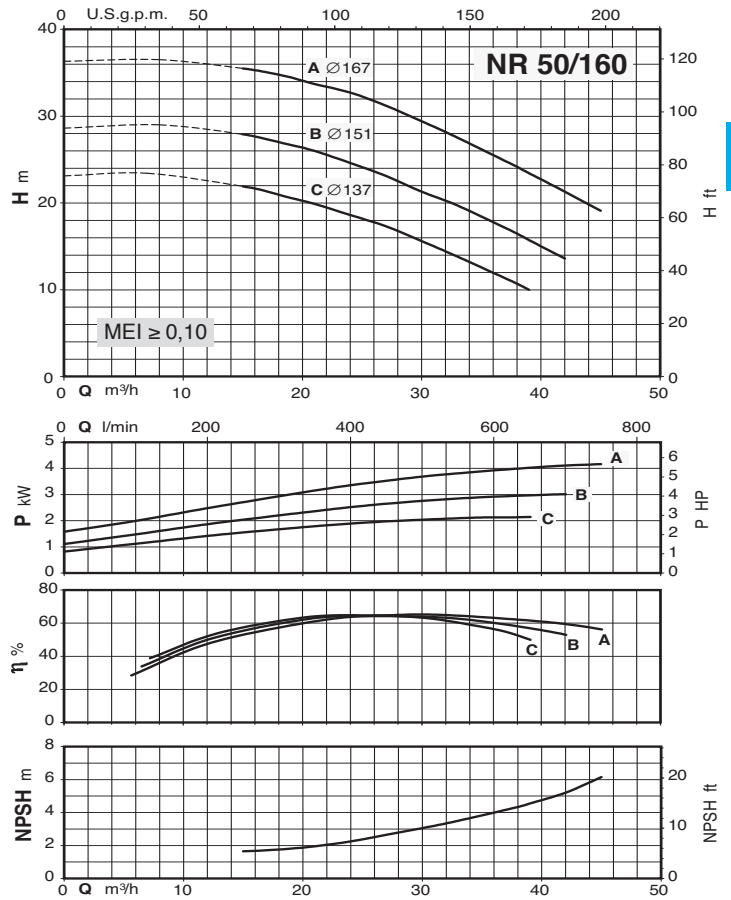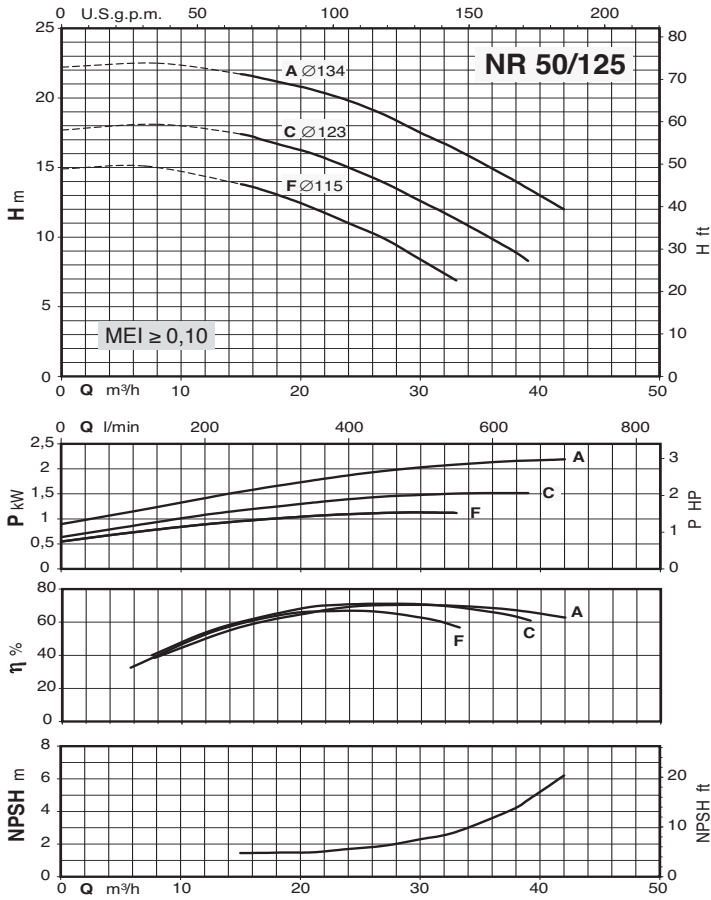




### Characteristic curves $n \approx 2900$ rpm

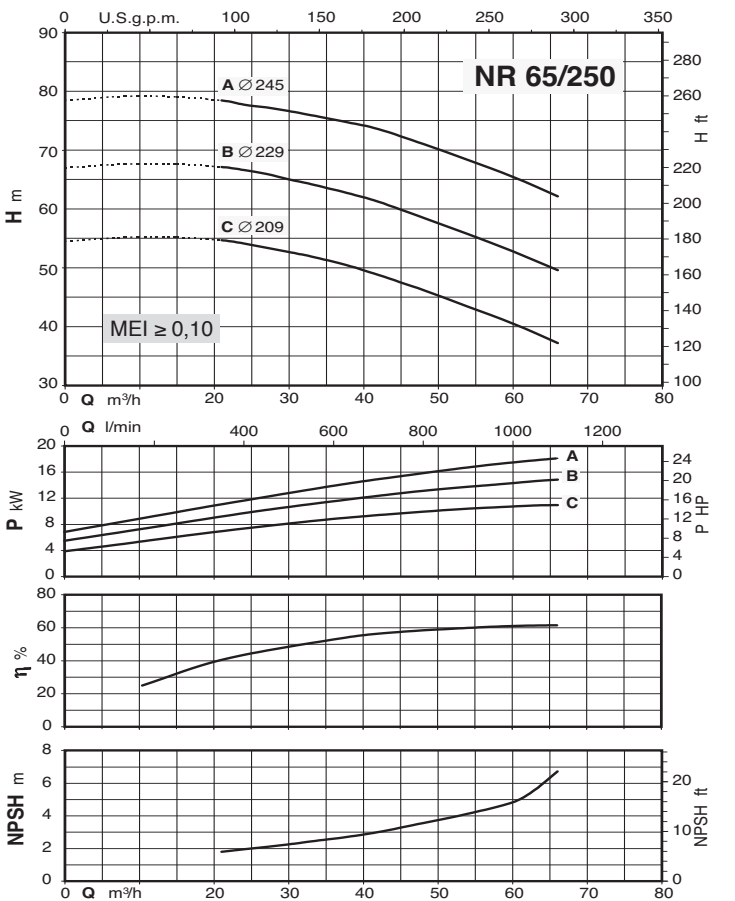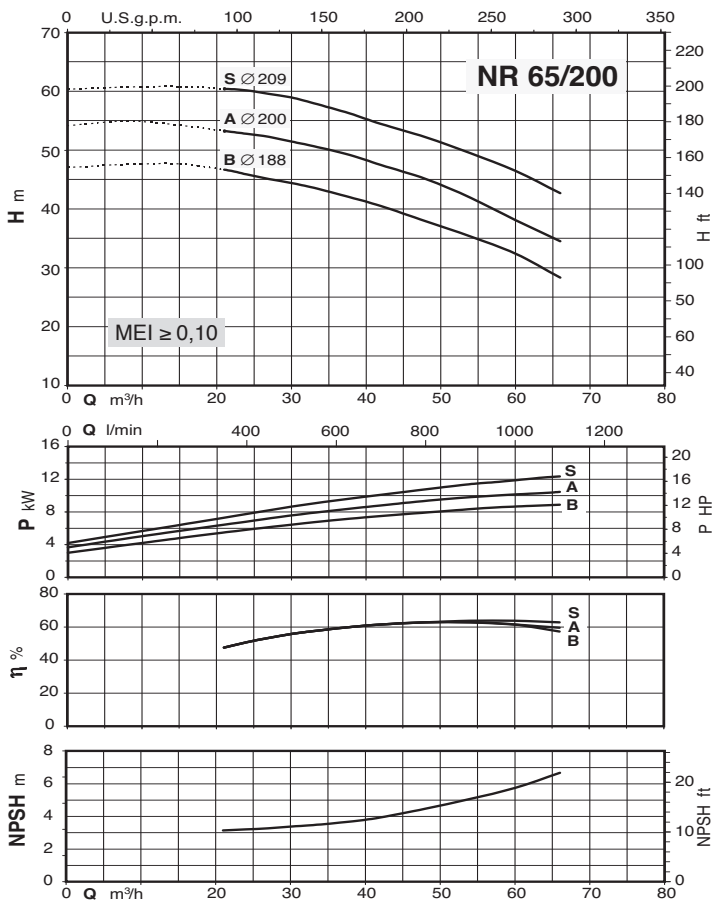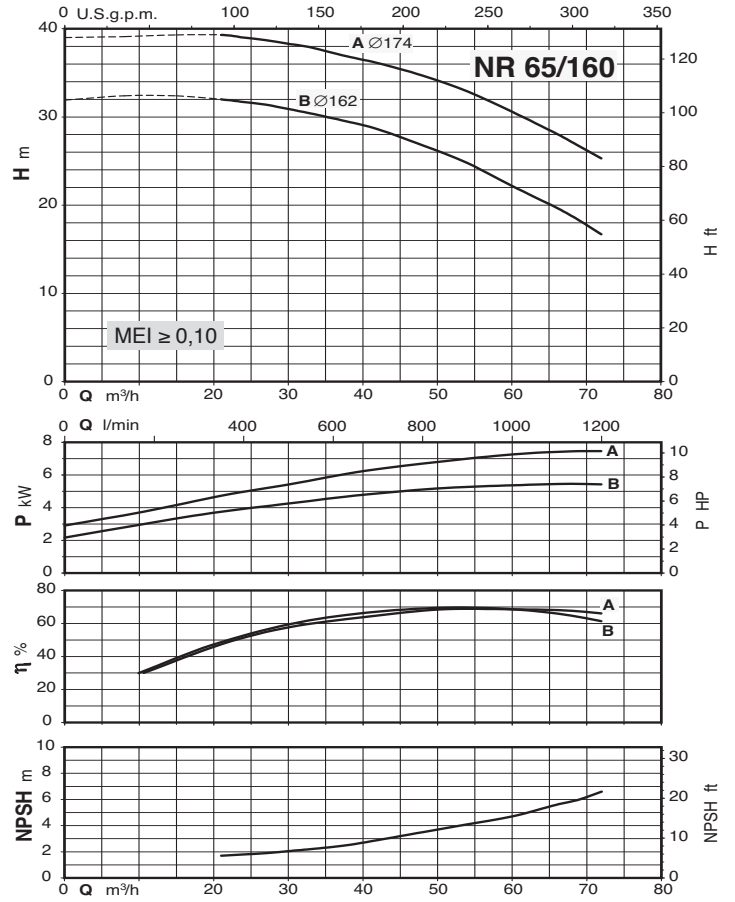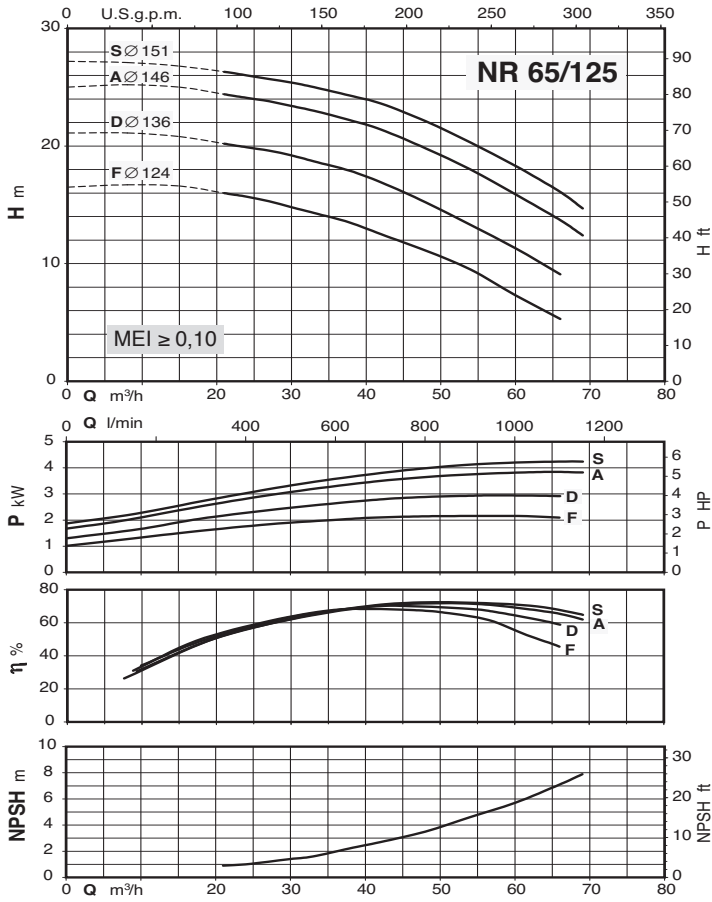









### Characteristic curves $n \approx 1450$ rpm

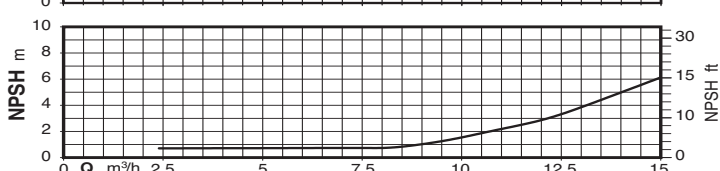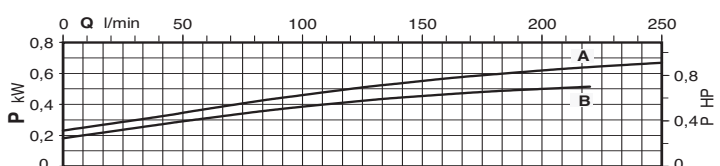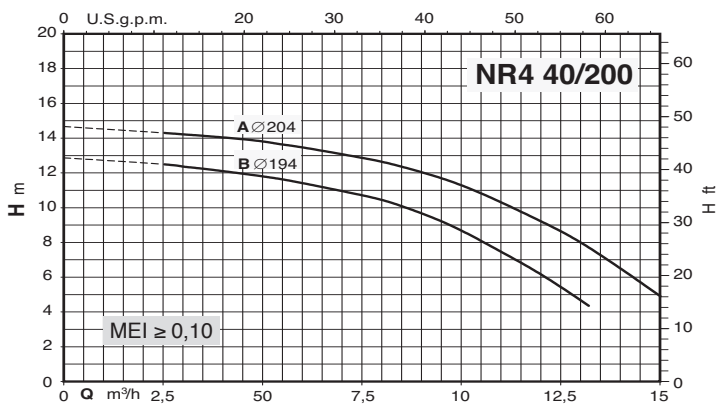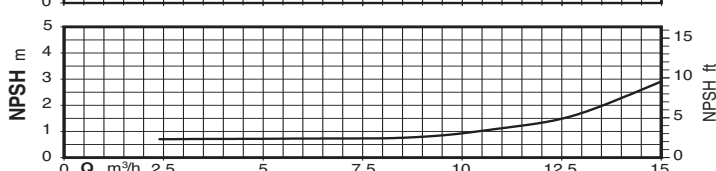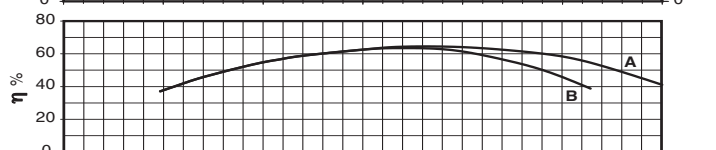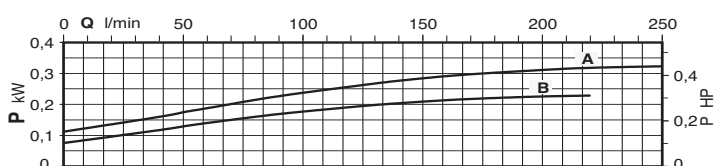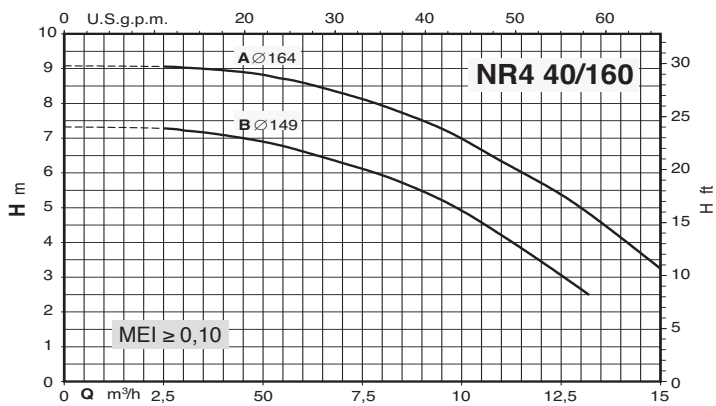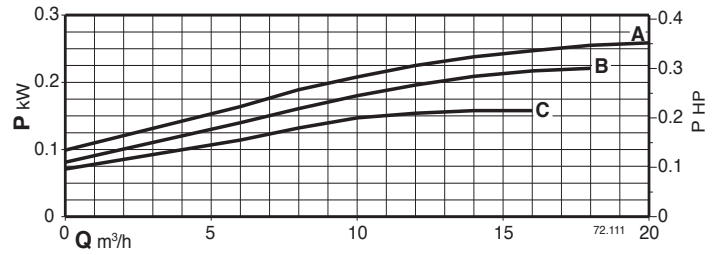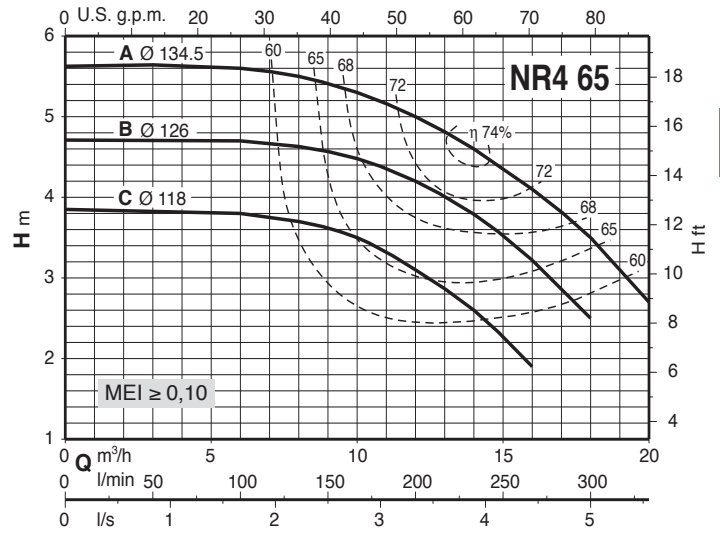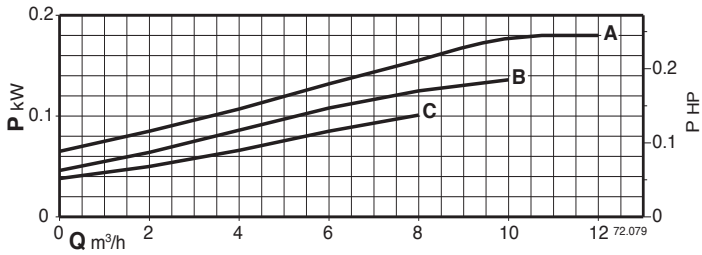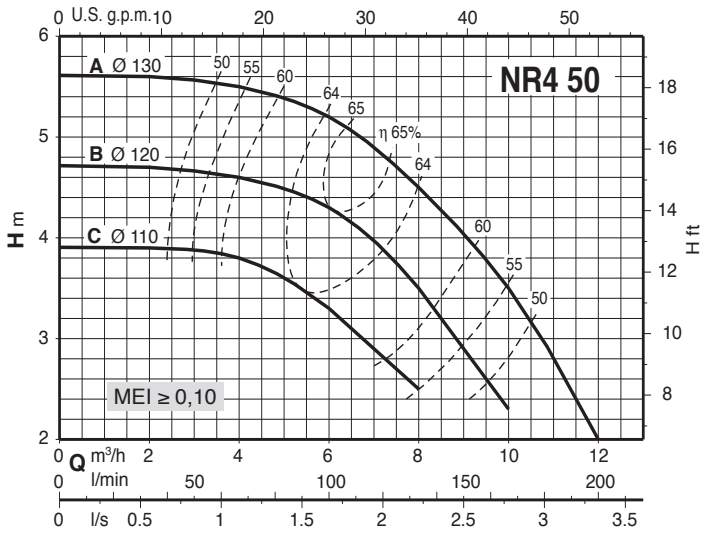





### Characteristic curves $n \approx 1450$ rpm

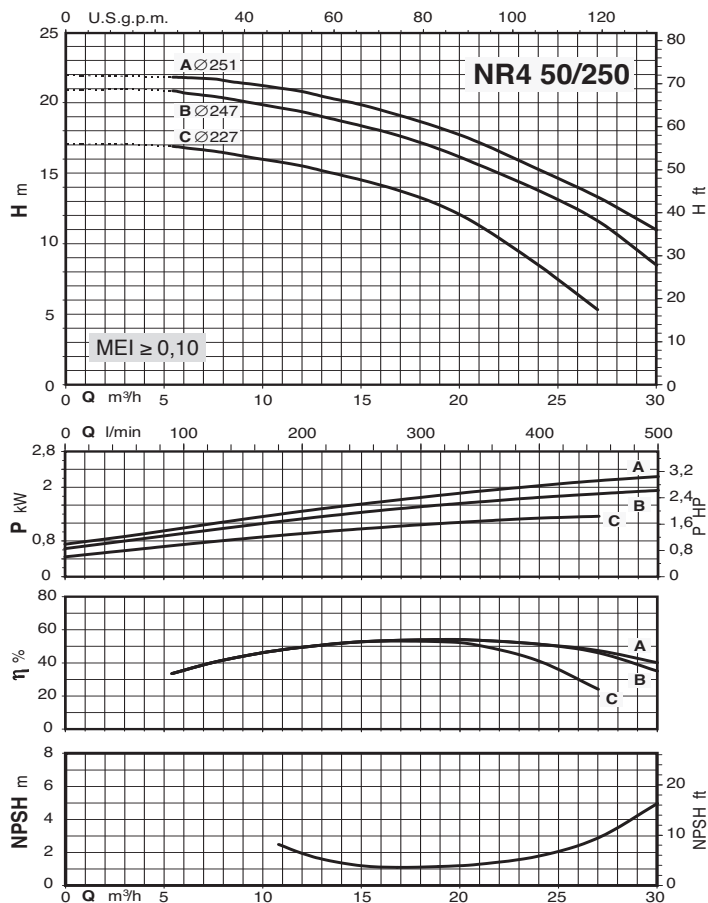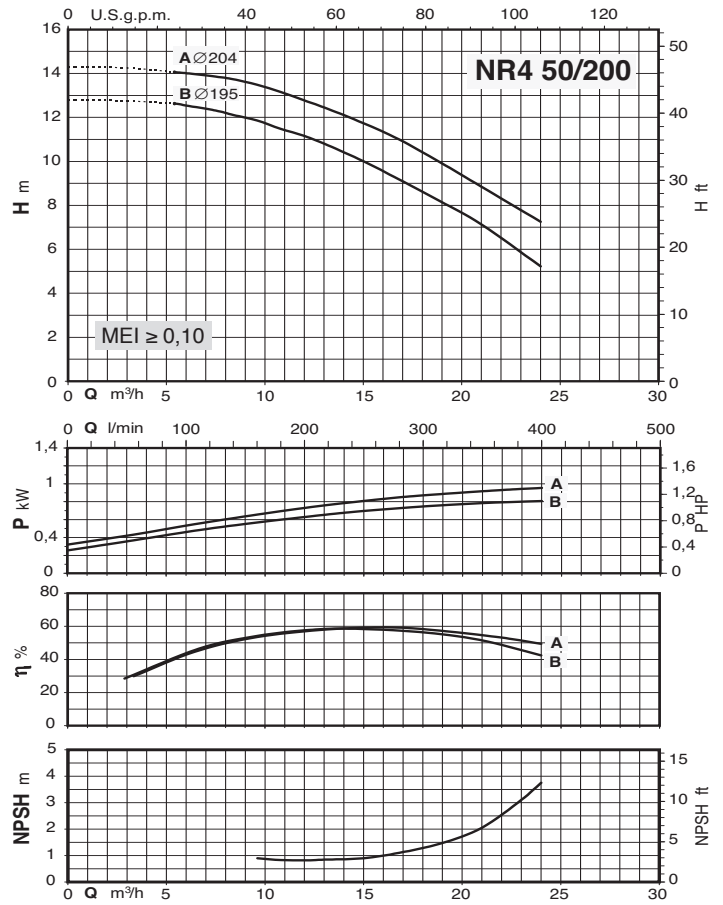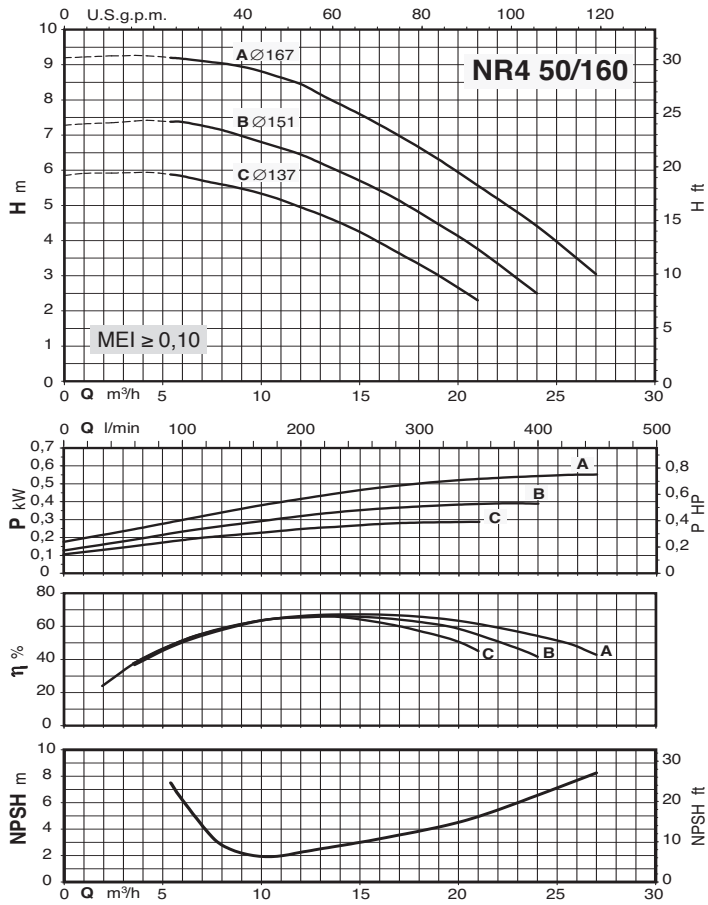


### Characteristic curves $n \approx 1450$ rpm

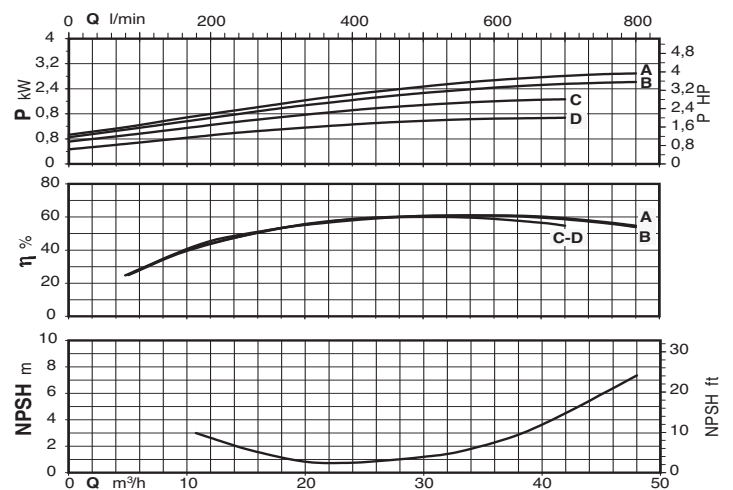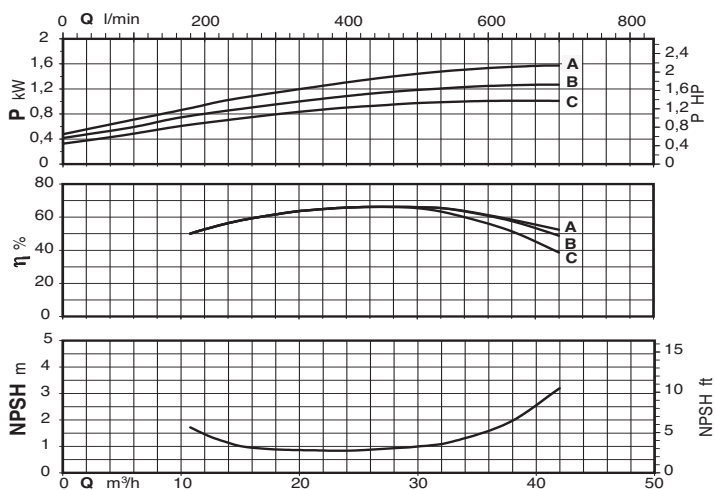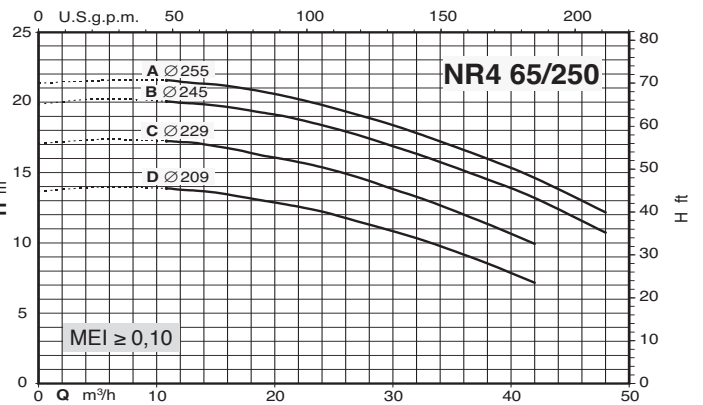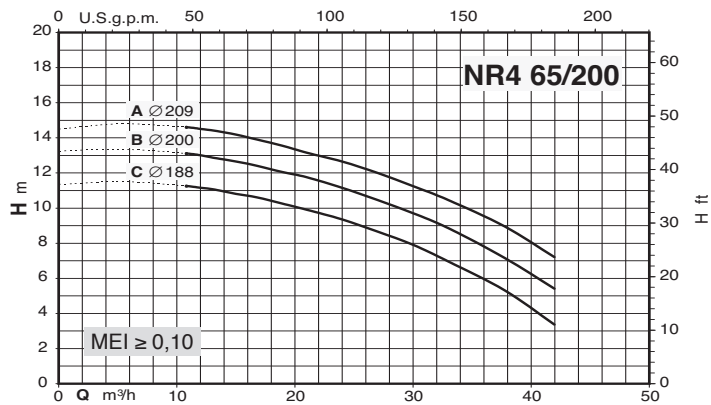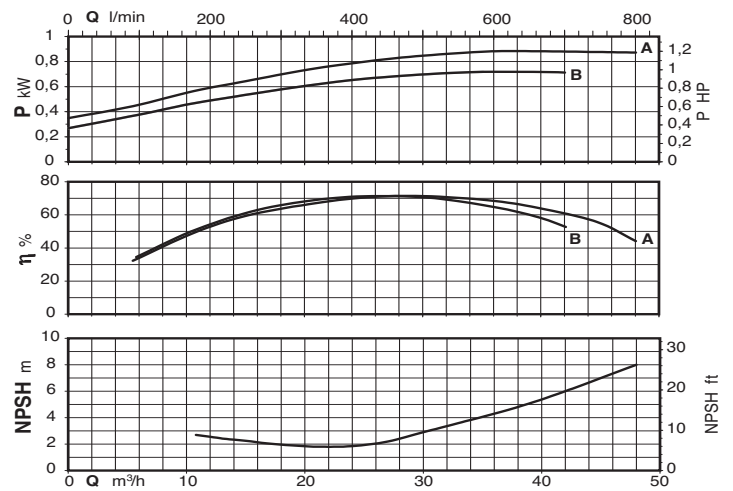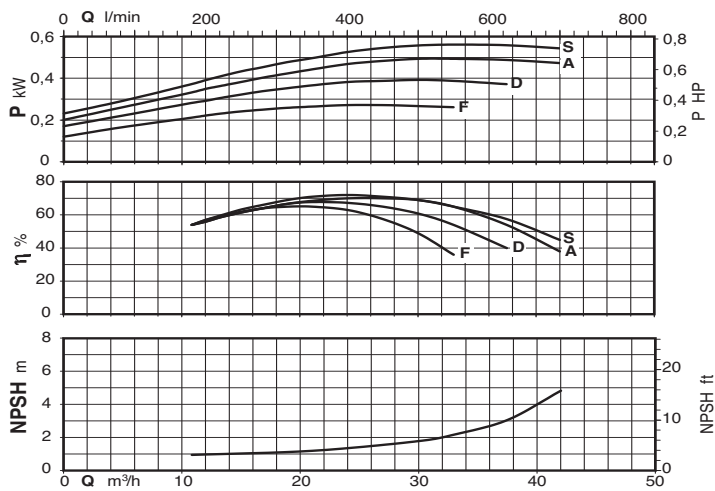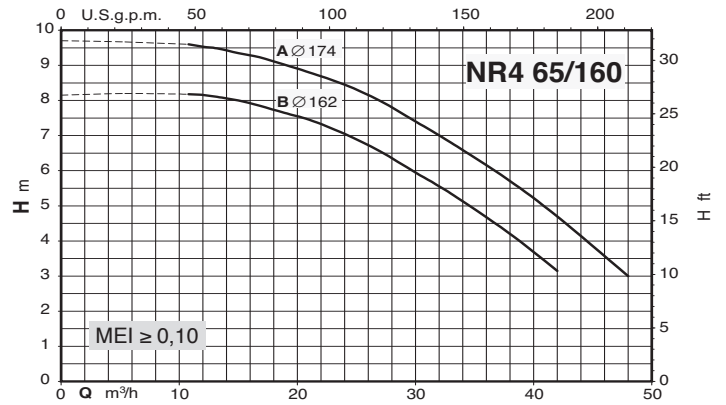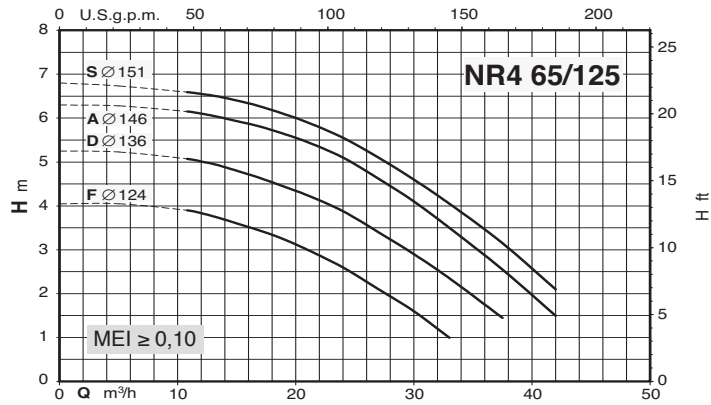

### Characteristic curves $n \approx 1450$ rpm

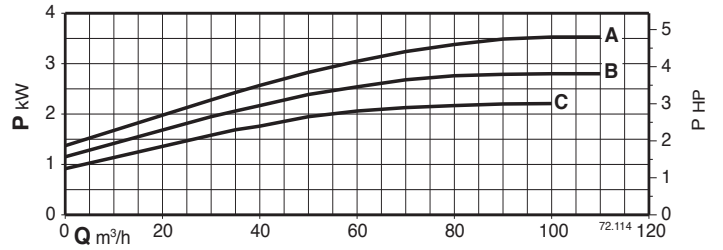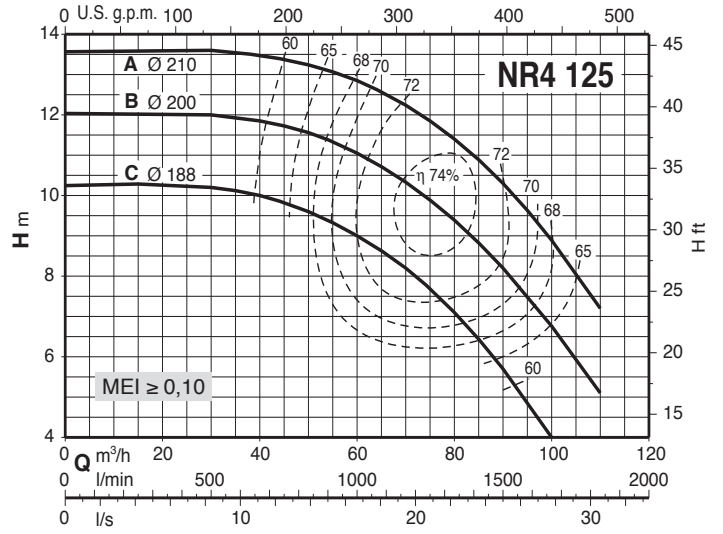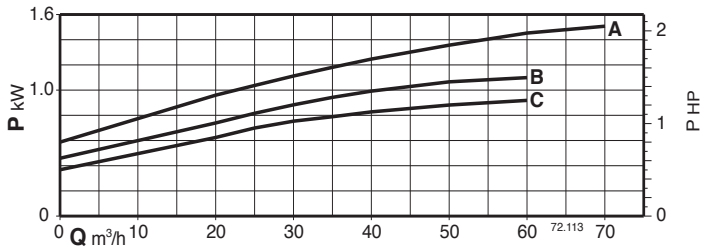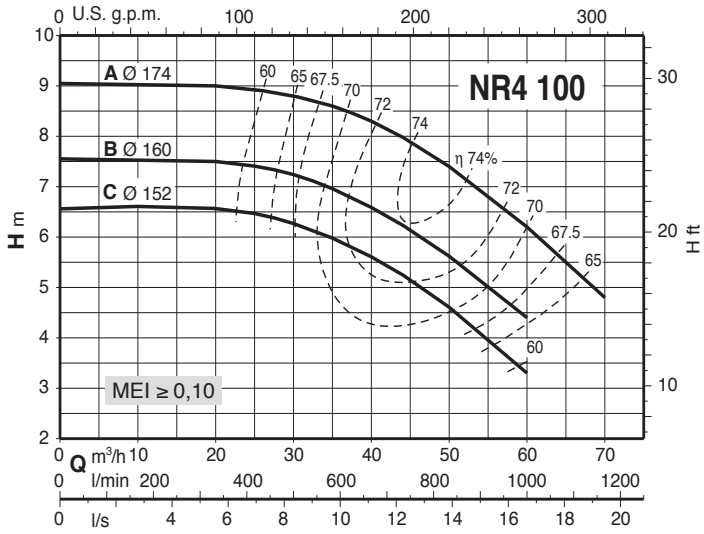


### Dimensions and weights

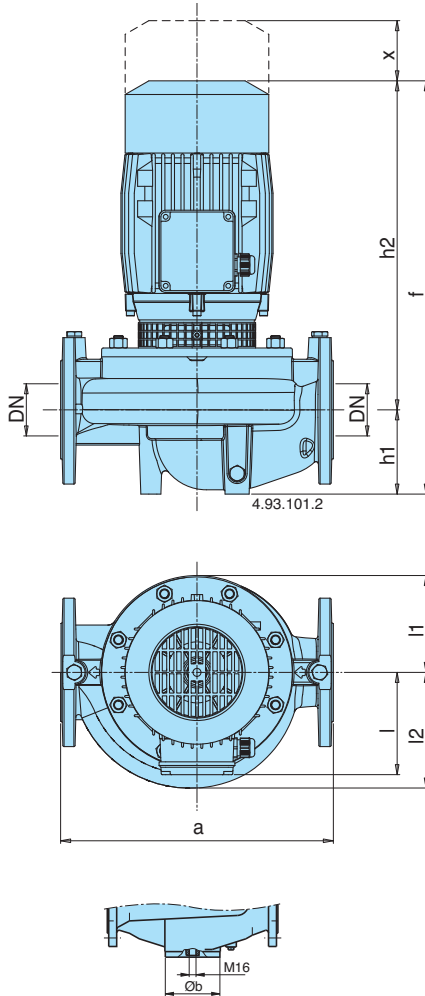

TYPE	mm										kg
	DN	a	f	h1	h2	Øb	l	l1	l2	x	
NR 50D/A-C/A	50	320	360	90	270	98	111	93	100	70	29,5-30
NR 40/125A-B-C	40	320	420	81	339	-	128	93	98	100	29,5-27,5-26,5
NR 40/160B	40	320	430	81	349	-	128	119	119	75	35,0
NR 40/160A	40	320	470	81	389	-	128	119	119	75	40,0
NR 40/200A-B	40	440	496	81	430	-	138	140	140	75	57,5 - 57
NR 50/125C-F	50	340	437	90	347	-	128	96	115	75	31,5-29,5
NR 50/125A/A	50	340	477	90	387	-	128	96	115	75	36,1
NR 50/160C/A	50	340	480	90	390	-	128	120	128	75	41,6
NR 50/160A/A-B/A	50	340	506	90	416	-	138	120	128	75	51,8-50,5
NR 50/200D/A	50	440	516	100	416	-	138	140	140	80	59,7
NR 50/200A/A-B/A	50	440	544	100	444	-	160	140	140	80	77,2-69,7
NR 50/250B/A-C/A	50	440	657	100	557	-	185	175	175	85	121-114
NR 50/250A/A	50	440	732	100	632	-	185	175	175	85	149,5
NR 65/125F/A	65	340	494	105	389	-	128	121	145	95	46
NR 65/125S/A-A/A-D/A	65	340	520	105	415	-	138	121	145	95	56,1-56,1-54,6
NR 65/160A/A-B/A	65	340	552	105	447	-	160	121	142	95	74-67,5
NR 65/200A/A-B/A	65	475	666	105	561	-	185	140	153	90	114-108
NR 65/200S/A	65	475	741	105	636	-	185	140	153	90	142,5
NR 65/250C/A	65	475	672	105	567	-	185	175	175	90	134
NR 65/250A/A-B/A	65	475	747	105	642	--	185	175	175	90	161-155


TYPE	mm										kg
	DN	a	f	h1	h2	Øb	l	l1	l2	x	
NR4 50A/A-B/A-C/A	50	320	360	90	270	98	111	93	100	70	24-24-24
NR4 65A/A-B/A-C/A	65	360	370	100	270	118	111	102	114	70	28-28-28
NR4 100B/A-C/A	100	500	523	150	373	162	128	153	173	105	59-59
NR4 100A/A	100	500	549	150	399	162	138	153	173	105	67
NR4 125C/A	125	600	589	170	419	194	138	172	195	120	91,5
NR4 125A/A-B/A	125	600	608	160	438	194	160	172	195	120	110-108
NR4 40/160A-B	40	320	430	81	349	-	128	119	119	75	31,5 - 31
NR4 40/200A-B	40	340	430	81	349	-	128	140	140	75	43 - 39,5
NR4 50/160A/A-B-C	50	340	440	90	350	-	128	120	128	75	37,5-35,5-33,5
NR4 50/200A/A-B/A	50	440	490	100	390	-	128	140	140	80	56
NR4 50/250B/A-C/A	50	440	516	100	416	-	138	175	175	85	80-77,5
NR4 50/250A/A	50	440	545	100	445	-	160	175	175	85	93,5
NR4 65/125S/A-A/A-D-F	65	340	454	105	349	-	128	121	145	95	
NR4 65/160A/A-B/A	65	340	497	105	392	-	128	121	142	95	42,7-42,5
NR4 65/200C/A	65	475	510	105	405	-	128	140	153	90	52
NR4 65/200A/A-B/A	65	475	536	105	431	-	138	140	153	90	64,5-60
NR4 65/250C/A-D/A	65	475	526	105	421	-	138	175	175	90	75,5-75,5
NR4 65/250A/A-B/A	65	475	555	105	450	-	160	175	175	90	98-85

Flanges PN 10, EN 1092-2



DN	mm					
	C	K	D	Holes N°	g2	
50	99	125	165	4	19	20
65	118	145	185	4	19	20
80	132	160	200	8	19	22
100	156	180	220	8	19	24
125	184	210	250	8	19	24

### Installation

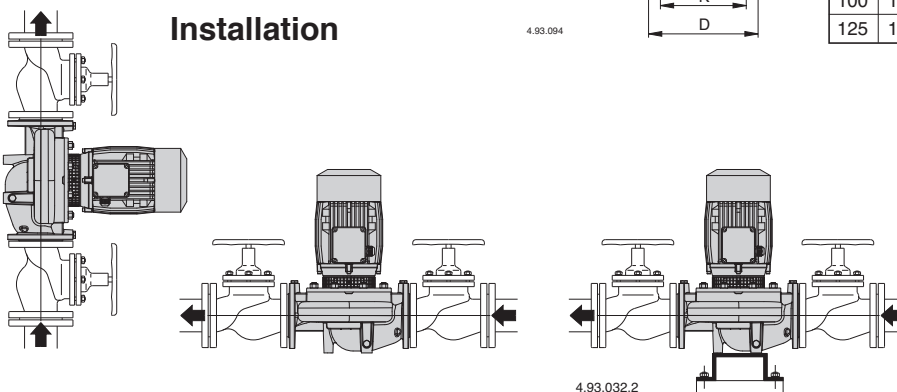

### Features

#### New Compact Design

A compact structure allows for simple installation even in confined spaces

#### A Unique Design

An innovative guard (patented) prevents contact with rotating parts, providing protection to the end user whilst allowing for inspection of the mechanical seal.

#### Advanced hydraulics

Optimum impeller geometry provides maximum efficiency and excellent suction characteristics.

#### Silent operation

Specially designed fluid ducts provide very quiet operation

#### Exceptional Fluid Dynamics

The fluid dynamics through the impeller and casing are designed to minimize losses and increase performance.

