


Triple Life Span Impeller Compared with Former Product

•Durable and long life time

Impeller is manufactured from a blended rubber compound providing maximum wear resistance up to three times over cast iron.

Maximal life-span and super hard mechanical seal.

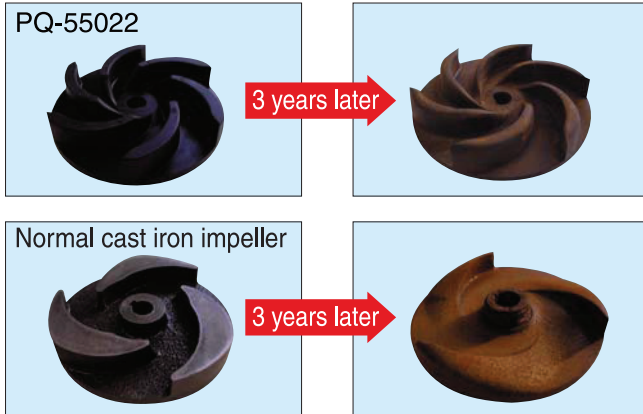


New



PQ-55022

■ Performance Curve

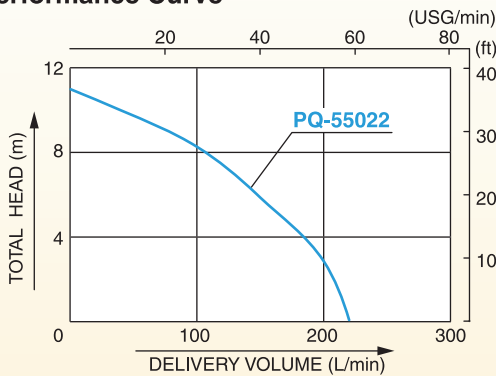

■ Specifications

Model		PQ-55022
PUMP	Connection Dia	50 mm (2")
	Total Head	11 m (36.1 ft)
	Delivery Volume	220 L/min (58 USG/min)
	Voltage	AC 220 V
MOTOR	Frequency	50 Hz
	Rated Current	2.7 A
	Output	400 W
	Consumption	550 W
	Revolution	2800 rpm
	Type	Induction Motor
	Power Cord	5 m (16.4 ft)
	Standard Accessories	1 Hose Band, 1 Rope (5 m (16.4 ft))
Gross Weight	12.5 kg (27.5 lbs)	
Dimensions LxWxH (mm)	245 × 205 × 410	
Packing Unit	1	